

Reinventing Spaces
LOOM⁺
 WOVEN DESIGN FLOORING

Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Korea
 Tel +82-2-520-7600
 Fax +82-2-598-9674
 www.noxglobal.com
 E-mail info@noxglobal.com

NOX Corp. | KOREA

Shinho Factory
 Shinho 2nd Factory, Yedang
 Enbo Factory
 Godeok Factory
 Bongsan Factory
 Deoksan Factory
 Choongnam, Korea

NOX US | USA

NOX US
 P.O. Box 824
 931 S. Springville Avenue
 Fostoria, OH 44830
 Office +01-419-701-5060
 Fax +01-419-701-5058

HERRINGBONE
 Classic & Cozy



LOOM⁺
 WOVEN DESIGN FLOORING

LOOM+
DIFFERENCE

LOOM+ DIFFERENCE

DESIGN AND TECHNOLOGY
ARE WOVEN TOGETHER

Infinite DESIGN spectrum

Only LOOM+ enables unique variation of creating your own floor by mixing and matching different patterns in two tile sizes.

Distinguished NOX EMT™ Core Structure

The first woven flooring with proven NOX EMT™ core structure that ensures the most stable and durable installation.

LOOM+ DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound Color Composition

Realizing multiple tones of color - carefully selected by artists - we provide you with very unique colors that expresses LOOM+ in harmony with surrounding interiors.



Infinite array of color and texture

Available in 59 colors covering diverse tones like neutral, cool, warm, light, and dark in five different yarn thicknesses, we give you nine unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to nine design patterns.



50x50cm
Standard size



25x100cm
Plank size

Optimal 2 Size variation

With our unique 2 module sizes of 50cmx50cm and 25cmx100cm, the first introduced in woven flooring market, you can elevate the flat environments to inspiring interior spaces.

LOOM+ TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT™ Core Structure

NOX EMT™ core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years



Clean & Tough



- + The first & only in woven flooring with NOX EPT™ shield treatment (Anti-Bacterial)
- + Strong enough for heavy commercial use

Dimensional Stability & Consistent Thickness



- + The most reliable NOX EMT™ core structure
- + Consistent product thickness by patterns for mix & match with different patterns

Fray-Proof



- + Clean-cut finishing for preventing fraying even when cutting tiles during installation



Safe
Certified non-toxic, phthalate-free, and fiberglass-free fabric



Quick
Quick and Easy ECOLAY® installation without glue



Easy
Minimal cleaning time and low maintenance



Silent & Soft
Soft surface absorbing sound



Non-Slip
Slip-resistance with woven fabric surface




Colorfast
Colorfast properties retain gorgeous original colors over time


HERRINGBONE

Classic & Cozy

NOX Herringbone collection offers versatility using cool and warm natural accent tones to create artistic design and comfort in any room. Offered in our new 25cmx100cm plank format, providing a rustic appearance when installed in an ashlar paving pattern.

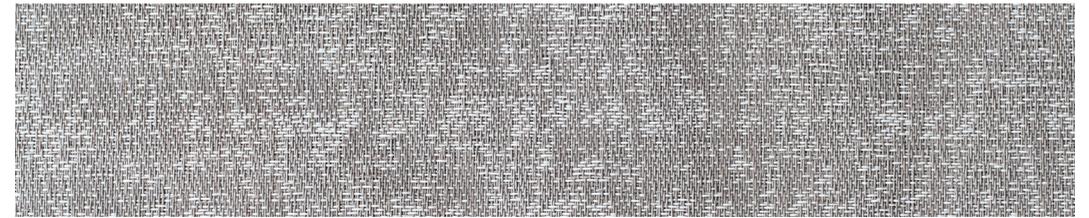

FQ-2501

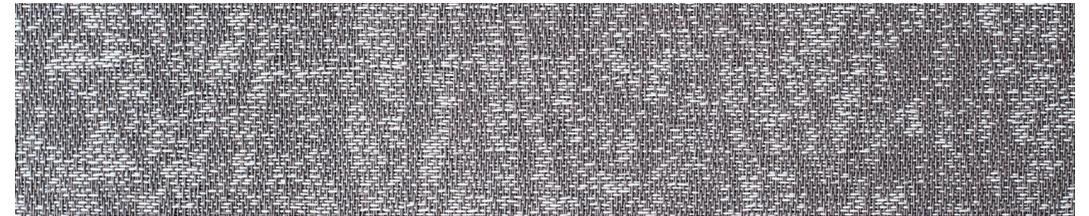


FQ-2502



FQ-2503



FQ-2504

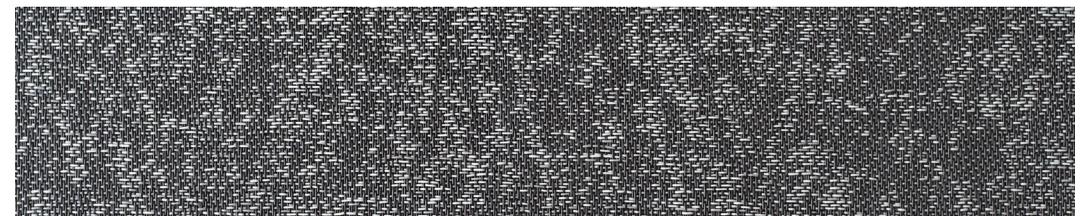

FQ-2505



FQ-2506

Reinvent Spaces with

LOOM⁺ PLAY!

New 25cmx100cm MIXMATCH plank brings new proportion and scale to your flooring to create fresh and exciting designs. In addition to new MIXMATCH plank, LOOM⁺ modular system includes 50cmx50cm squares.

All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.




50x50cm




25x100cm


INSTALLATION CONCEPT GUIDE




LOOM PLAY #1




LOOM PLAY #2




LOOM PLAY #3




LOOM PLAY #4




LOOM PLAY #5




LOOM PLAY #6




LOOM PLAY #7




LOOM PLAY #8




LOOM PLAY #9




LOOM PLAY #10




LOOM PLAY #11




LOOM PLAY #12




LOOM PLAY #13




LOOM PLAY #14




LOOM PLAY #15




LOOM PLAY #16




LOOM PLAY #17



LOOM PLAY #18




LOOM PLAY #19




LOOM PLAY #20


NEW LOOM⁺ PLAY!




LOOM PLAY #21




LOOM PLAY #22




LOOM PLAY #23




LOOM PLAY #24




LOOM PLAY #25




LOOM PLAY #26




LOOM PLAY #27




LOOM PLAY #28




LOOM PLAY #29




LOOM PLAY #30




LOOM PLAY #21




LOOM PLAY #22




LOOM PLAY #23




LOOM PLAY #24




LOOM PLAY #25




LOOM PLAY #26




LOOM PLAY #27



LOOM PLAY #28



LOOM PLAY #29




LOOM PLAY #30

Residential

GLOBAL
REFERENCES

LOOM⁺
CREATE
YOUR OWN DESIGN

FQ-2501 FQ-2502




LOOM PLAY #22

Restaurant



FQ-2502 FQ-2503
FQ-2505




LOOM PLAY #21

Corporate



FQ-2501 FQ-2502
FQ-2506




LOOM+ PLAY
MIX&MATCH

Retail shop



FQ-2501 FQ-2505
FQ-2506




LOOM PLAY #21

Hospitality



FQ-2503




LOOM PLAY #24

Education & Libraries



FQ-2501 FQ-2502
FQ-2505 FQ-2506




LOOM PLAY #27

Healthcare




FQ-2502 FQ-2503
FQ-2504 FQ-2505



LOOM PLAY #25

Sports Center



LOOM PLAY #26

FQ-2501 FQ-2502
FQ-2505

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m ² /Box	Kg/m ²
500x500	3	16 pcs/box	4 m ²	5.0
	5	10 pcs/box	2.5 m ²	8.2
250x1000	3	16 pcs/box	4 m ²	5.0
	5	10 pcs/box	2.5 m ²	8.2

2. Test Result

Test Item		Standard	LOOM ⁺
Level of use		EN 685	33
Fraying		EN 1814	Frayproof
Thermal resistance		ISO 8302	0.02m ² K/W
Castor chair resistance		EN 985	No damage
Dimensional stability		ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance		EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness		ISO 105-B02	≥ 6
Slip resistance		DIN 51130 EN 13893	R11 DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness		ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate



Visit www.loomplus.com for the detailed installation / maintenance guides and technical information.